

USHIO

CHARACTERISTICS & SPECIFICATIONS

APPLICATIONS


Voltage: 115V, 120V, 230V and 240V

- ETC Source Four™ rated up to 750W
- ETC Source Four™ jr & Source Four™ jr Zoom rated up to 575W
- ETC Source Four™:
PAR EA— up to 750W
PAR MCM — up to 575W
PARnel — up to 750W

Low Voltage: 77V

- ETC Source Four™ fixture family using ETC Dimmer Doubling

Licensed under U.S. Patent #RE36316 claims 9-12 and 16-17 only; Canadian Patent #2,103,358; European Patent #920589 & #969496. No other licenses expressed or implied.

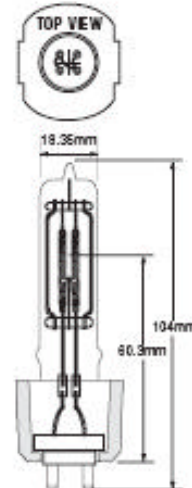

Watts (W)	Ushio Ordering Code	Ushio Lamp Code	Description	Filament Type	Color Temp (K)	Initial Lumens (lm)	Average Life (h)
77 Volt for Dimmer Doubling							
550	1000668	HPL-550/77V+	JS77V-550WC	4-C8	3250	16170	300
550	1000669	HPL-550/77X	JS77V-550WX	4-C8	3050	12160	2000
115 Volt							
375	1000666	HPL-375/115V+	JS115V-375WC	4-C8	3250	10540	300
375	1000667	HPL-375/115X+	JS115V-375WX	4-C8	3050	8000	1000
575	1000670	HPL-575/115V+	JS115V-575WC	4-C8	3250	16520	300
575	1000671	HPL-575/115X+	JS115V-575WX	4-C8	3050	12360	2000
750	1000675	HPL-750/115V+	JS115V-750WC	4-C8	3250	21900	300
750	1003153	HPL-750/115X+	JS115V-750WX	4-C8	3050	16400	1000
120 Volt							
575	1000672	HPL-575/120V+	JS120V-575WC	4-C8	3250	16520	300
575	1002283	HPL-575/120X+	JS120V-575WX	4-C8	3050	12360	2000
750	1003144	HPL-750/120V+	JS120V-750WC	4-C8	3250	21900	300
750	1003178	+HPL-750/120X+	JS120V-750WX	4-C8	3050	16400	2000
230 Volt							
375	1003182	HPL-375/230X+	JS230V-375WXN	6-C8	3000	7250	1000
575	1000673	HPL-575/230V+	JS230V-575WCN	6-C8	3200	14900	400
575	1002233	HPL-575/230X+	JS230V-575WXN	6-C8	3050	11780	1500
750	1002289	HPL-750/230V+	JS230V-750WCN	6-C8	3200	19750	300
750	1003179	HPL-750/230X+	JS230V-750WXN	6-C8	3050	15600	1500
240 Volt							
375	1003183	HPL-375/240X+	JS240V-375WXN	6-C8	3000	7250	1000
575	1000674	HPL-575/240V+	JS240V-575WCN	6-C8	3200	14900	400
575	1002234	HPL-575/240X+	JS240V-575WXN	6-C8	3050	11780	1500
750	1003184	HPL-750/240V+	JS240V-750WCN	6-C8	3200	19750	300
750	1003180	*HPL-750/240X+	JS240V-750WXN	6-C8	3050	15600	1500

*availability to be announced